B.E.G. LUXOMAT®

DATA SHEET

## Photoelectric switches - Relay

# CdS-SM



white , Part No. 92369

## Product Information

- Photoelectric switch for automatically switching
- Activation and deactivation delay with self-learning deactivation-light value
- Integrated automatic function (10 Lux / 40 sec. activation / 120 sec. deactivation delay)
- LED adjustment aid (without delay) for adjustment of the switch-on threshold
- Light value and activation/deactivation delay may be set from the outside using the potentiometer
- Double cable inlet from underneath possible
- Wall and mast installation

## Technical Data

| | |
|---|---|
| **Voltage:** | 110 – 240 V AC 50 / 60 Hz |
| **Dimensions:** | 42 x 80 x 96 mm |
| **Power consumption:** | < 0.5 W |
| **Degree / class of protection:** | IP54 / Class II |
| **Ambient temperature:** | -25 °C to +50 °C |
| **Housing:** | polycarbonate, UV-resistant |
| | **Channel 1 (lighting control)** |
| **Switching power:** | 2300 W, cos φ = 1<br>1150 VA, cos φ = 0.5 |


**Type of contact:** 1x µ-contact, NO contact

**Switch-on and -off delay:** 1 s - 120 s


**Switch-on threshold:** 2 – 1000 Lux

## Description

| Description | Colour | Part number | EAN number |
|---|---|---|---|
| CdS-SM | white | 92369 | 4007529923694 |

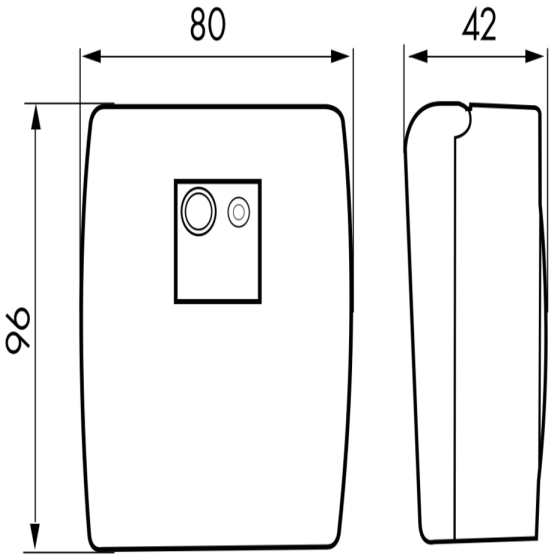


Dimensions 92369

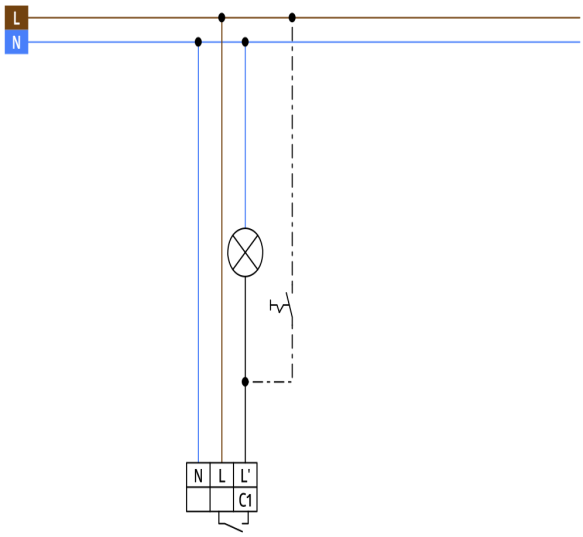


Wiring diagramms

© 2022 B.E.G. Brück Electronic GmbH