B.E.G. LUXOMAT®

DATA SHEET

Photoelectric switches - Relay

CdS-T-SM



white mat, similar to
RAL9010 , Part No. 92367

Product Information

- Remote control-capable photo electric switch with integrated timer
- Energy-saving period may be programmed with the integrated timer by the touch of a button
- Inputting the current light value by the touch of a button
- Infrared remote control included
- Relay with tungsten pre-make contact, optimised for LED loads
- **Application examples:** ideal for entrance areas, staircases, halls where permanent light is required

Technical Data

Voltage:	110 – 240 V AC 50 / 60 Hz
Dimensions:	69 x 63 x 55 mm
Power consumption:	< 0.5 W
Degree / class of protection:	IP54 / Class II
Ambient temperature:	-25 °C to +50 °C
Housing:	polycarbonate, UV-resistant
	Channel 1 (lighting control)
Switching power:	2300 W, cos φ = 1 1150 VA, cos φ = 0.5 max. inrush current Ip (20 ms) = 165 A


	max. inrush current Ip (200 µs) = 800 A
Type of contact:	1x NO contact with tungsten pre-make contact
Switch-on threshold:	2 – 300 Lux

Description


Description	Colour	Part number	EAN number
CdS-T-SM	white mat, similar to RAL9010	92367	4007529923670

Accessory

Description	Colour	Part number	EAN number
BLE-IR-Adapter	black	93067	4007529930678
IR-CdS-T	-	92368	4007529923687

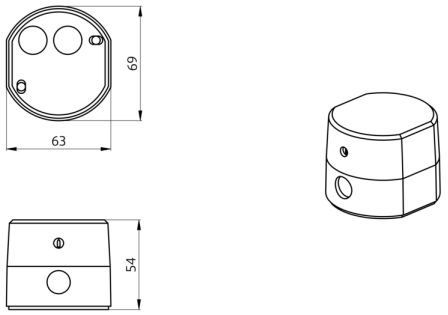

Dimensions 92367

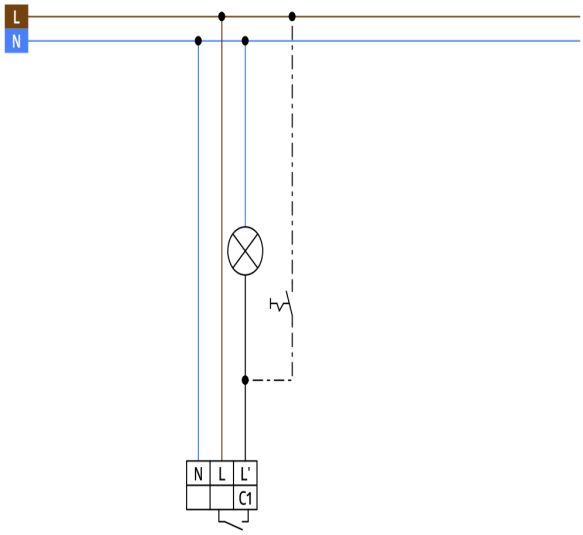

Wiring diagramms

© 2022 B.E.G. Brück Electronic GmbH